



Max Machinery, Inc.  
an ISO 9001:2008 certified company

## Model P001 Piston Flow Meter (Analog)

### 0.005 to 200 cc/min

#### SPECIFICATIONS

Flow Range	0.005 to 200 cc/min – dependent on viscosity
Accuracy (3 cP)	± 0.2% of reading over a 200:1 range, or ± 2mV (or 4µA), whichever is greater
Maximum Operating Pressure	500 bar (7250 psi)
Displacement	0.3 cc/rev
Weight	0.9 kg
Recommended Filtration	5 micron
Port Size(s)	1/4" or 6mm tube fitting
Fluids	Most non aqueous, organic liquids
Dimensions	Ø 57mm x 90mm tall (Ø 2.3" x 3.5" tall)



#### MATERIALS OF CONSTRUCTION

Body	Case hardened stainless steel, type 316
Pistons	Case hardened stainless steel, type 316
Crankshaft	Stainless steel, type 316
Bearings	Hybrid - ceramic balls with enhanced corrosion resistant stainless steel
O Rings	Viton®- standard, Perfluoroelastomer - option

#### ANALOG TRANSMITTER

Output Signal	Any range of ± 10V or ± 20mA Linearized and damped with anti-dither protection
Power Supply Requirements	Two Models: 12Vdc @ 90 mA, 24Vdc @ 45 mA
Ambient Operational Range	-40°C to 80°C, Single piece – Two piece to 110°C
Metered Liquid Temp Range (based on 20° ambient)	-40°C to 90°C, Standard model -40°C to 155°C, Two piece high temperature model -40°C to 225°C, Two piece, ultra high temperature model
Compliance	CE Certified, Ex-proof version available with ATEX/IECEx II 2 G Ex d IIB Tx Gb as well as UL, cUL certification for Class 1, Division 1, Groups C and D, Tx



P001 Standard




P001 Two piece  
(ultra-high temp. model)




P001 Ex-Proof  
housing


# Model P001 Piston Flow Meter (Analog)

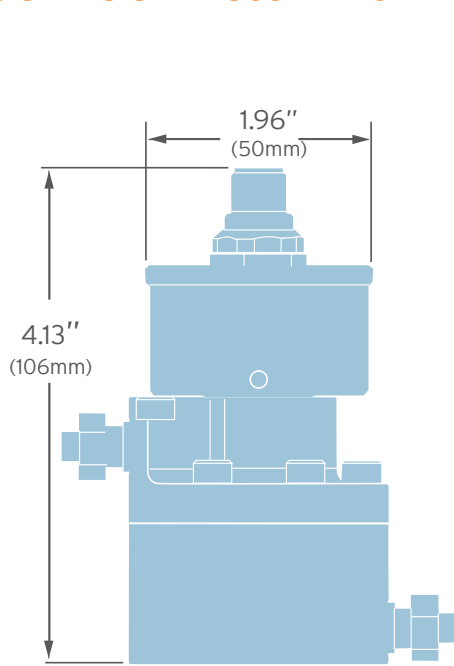


Model P001 meter with industrial transmitter

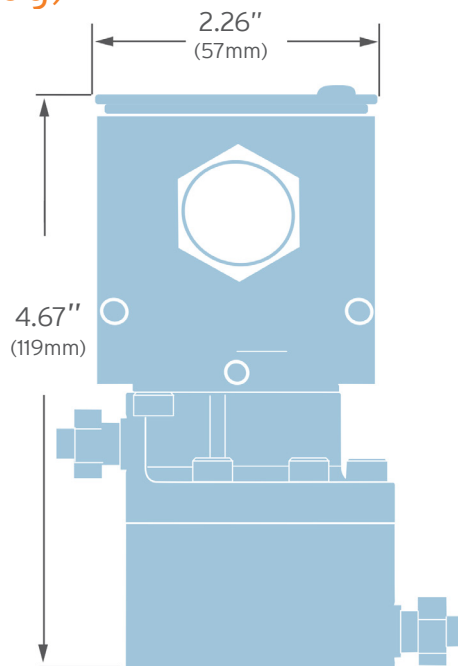

Model P001 meter with Explosion Proof transmitter

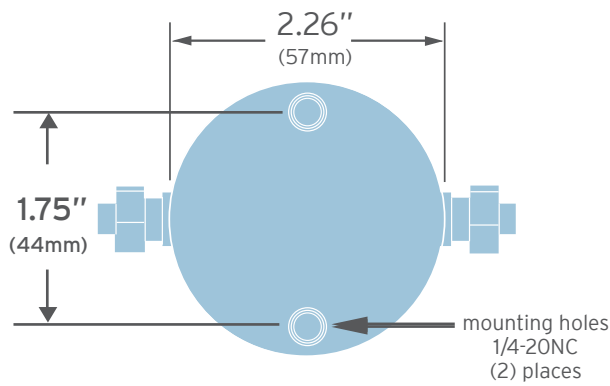


Bottom View

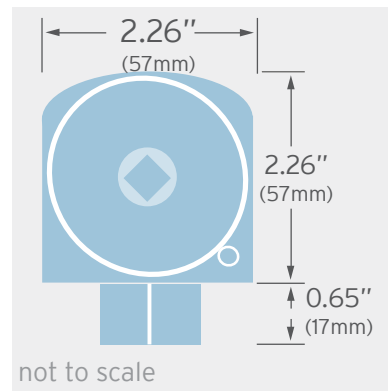

not to scale

Top View of Explosion Proof Enclosure

not to scale

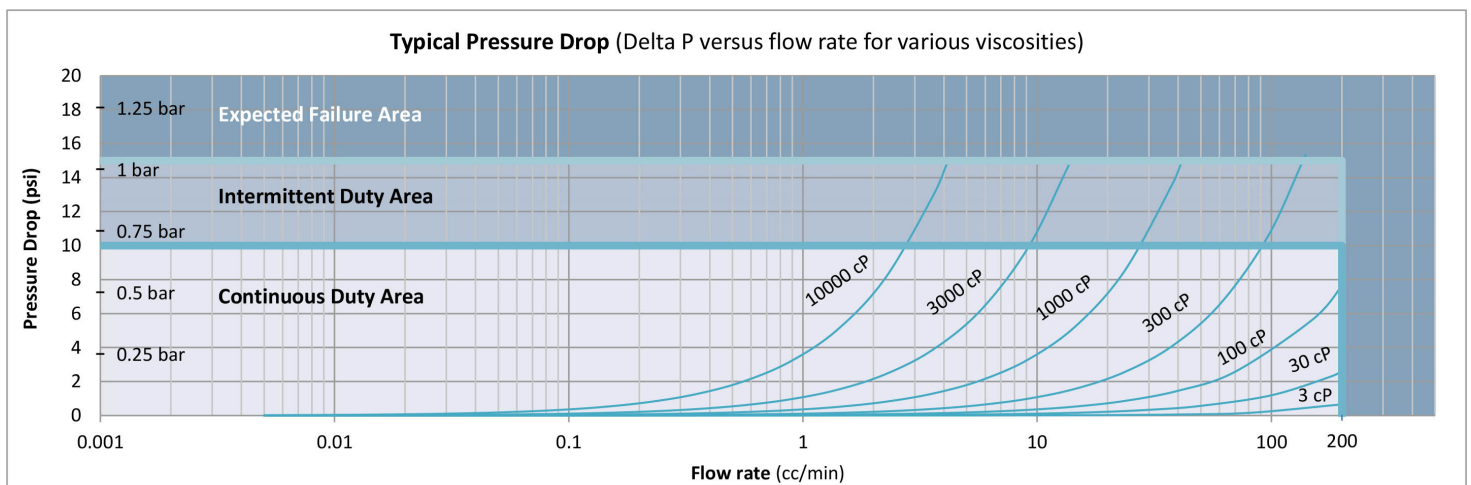




Max Machinery, Inc.  
an ISO 9001:2008 certified company

# Positive Displacement Flow Meters Piston Type, 7250 psi (500 bar) rated

## Flow Meter Selections

## Transmitter Selections

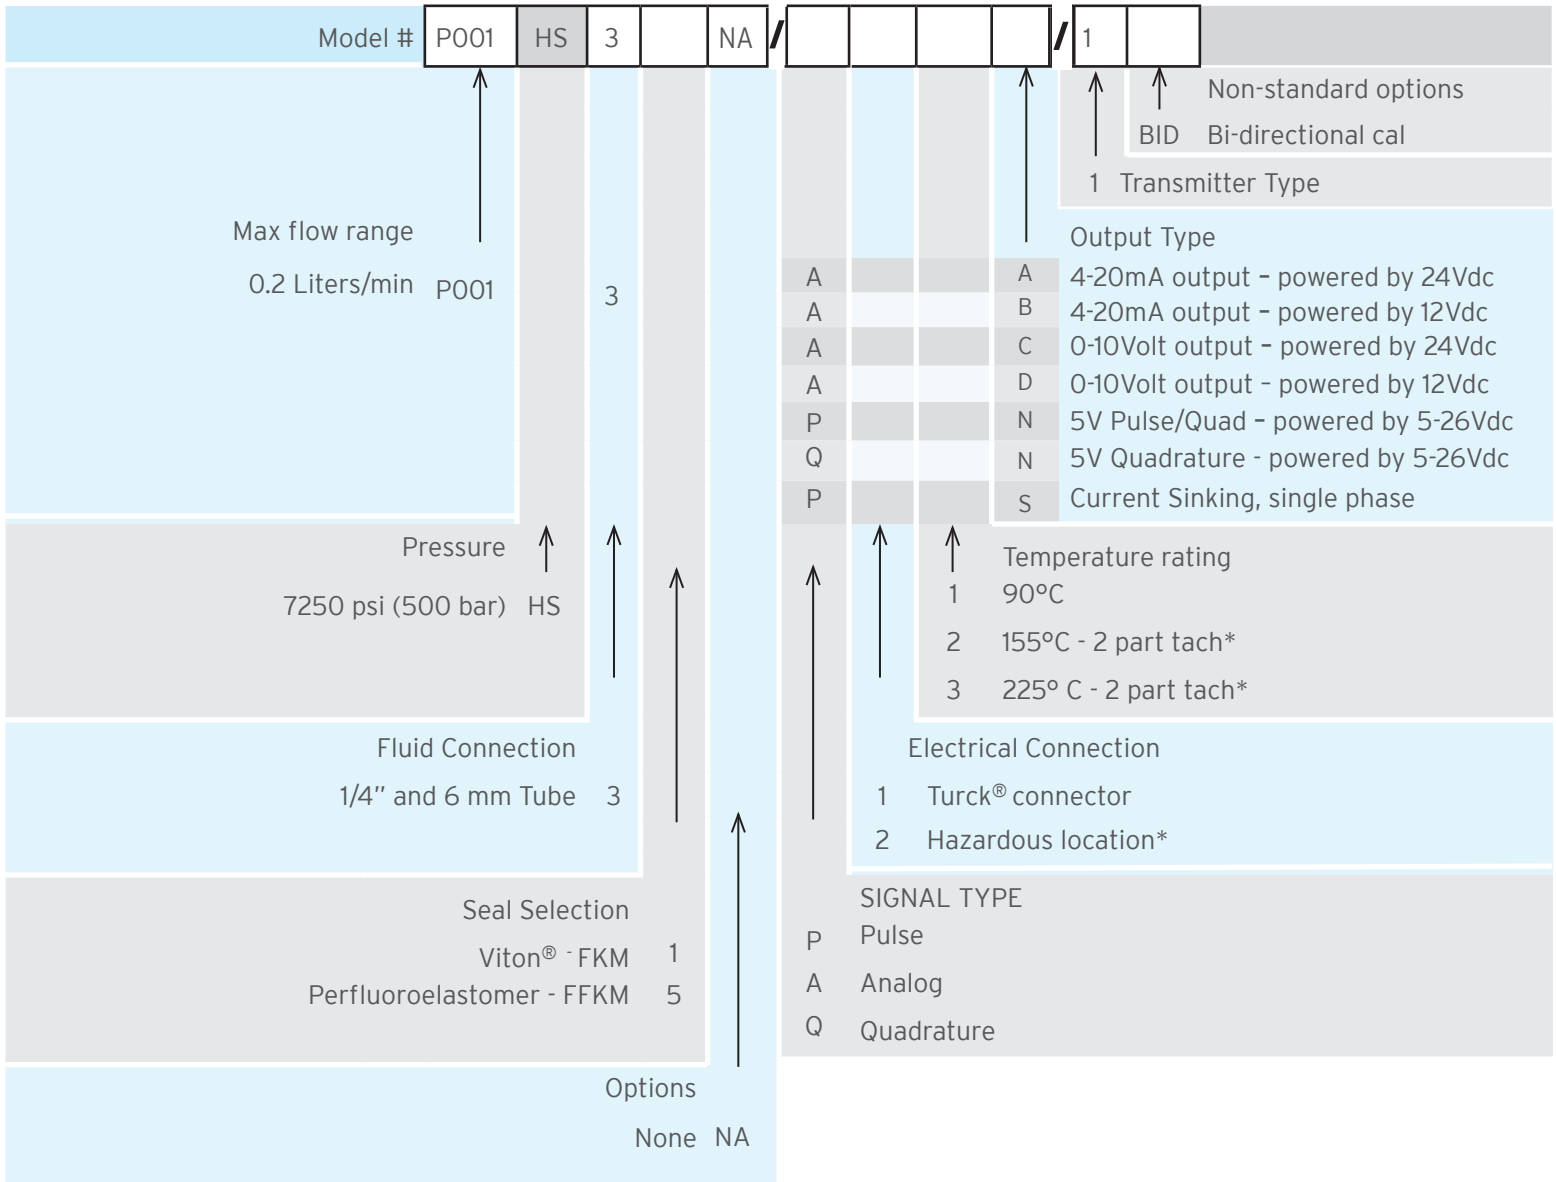

Product includes single directional calibration, bi-directional calibrations for Analog and Quadrature devices are optional.

\* Consult factory regarding 130°C maximum and other temperature limitations for hazardous location installations.